


corner "Q" 19 Poles $5\frac{1}{2}$ lks east of corner heretofore established at half distance between $E\frac{1}{2}$ m p and center of Section witness Sycamore 12 $N 9^{\circ} W 37$ lks Black walnut 2 $S 84^{\circ} W 49$ lks Then commenced at corner heretofore established at half distance between $E\frac{1}{2}$ m p and center of Section Ran $N 45^{\circ} E$ To the N.E. corner of the S.E. qr of the N.E. qr corrected back and established corner "R" at the crossing of the road at a point 29 Poles 7 lks from the starting point in said line witness Elm 18 $N 25^{\circ} E 64$ lks Sycamore 24 $N 40^{\circ} E 63$ lks The above Survey was made in compliance with the accompanying notice which was published in the "Saturday Courier" a weekly newspaper published in Bloomington Ind for three successive weeks before the commencing of said Survey and by reading a copy of said notice to resident land owners by John Sexton 10 days previous to the commencement of Survey

M W Buskirk, M.C.S

Lyford & Reynolds Survey Sec. 16. T10. R 2 W

(This plat represents the
N.W. qr of Sec 16. T10. R 2 W)

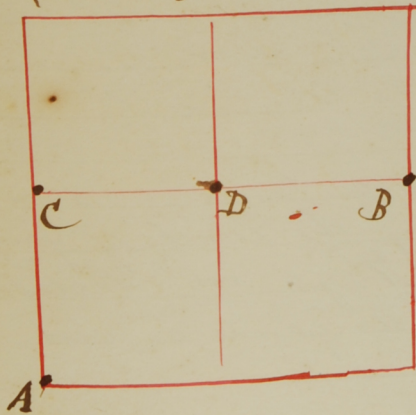

April 25th 1889 commenced at corner heretofore established at the center of Section 16 T10 R. 2 W ran north 160 Poles 23 lks to $N\frac{1}{2}$ m p Thence west 163 Poles 13 lks to N.W. cor. Thence South 163 Poles 13 lks to $W\frac{1}{2}$ m p made new witnesses at $W\frac{1}{2}$ m p "A" maple 18 $S 48^{\circ} E 36$ lks Elm 8 $N 18\frac{1}{2}^{\circ} E 93\frac{1}{2}$ lks East corner half dist bet center and $N\frac{1}{2}$ m p "B" Thence Beech 24 $S 78^{\circ} E 41$ lks

witness Beech 10 $S 69^{\circ} W 31$ lks Beech 24 $S 78^{\circ} E 41$ lks Established corner at half dist between $W\frac{1}{2}$ m p and N.W. cor "C" Stone in open ground Established corner "D" in center